




## Butterfly valve

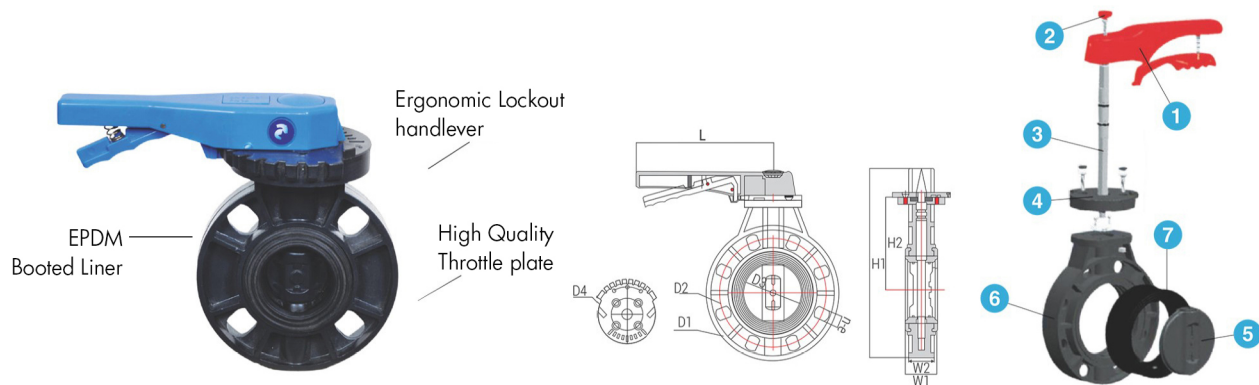

- Disc available in different materials (PVC-U, CPVC, PP-H).
- Ideally suited for flow control using minimal piping space.
- 100% factory tested.
- Minimal pressure drop.
- Built in lockout feature to prevent undesired operations.
- Stainless steel shaft (AISI 630).

- Sleek PP handle.
- Low maintenance.
- Resistance to many inorganic chemicals.
- Excellent flow characteristics.
- Good mechanical strength.
- One piece PP - GF body.

## Parts List

- |                                |           |
|--------------------------------|-----------|
| 1. Operator (Lever or Gear).   | 5. Disc.  |
| 2. Bezel (Screw).              | 6. Body.  |
| 3. SSTL Stem.                  | 7. Liner. |
| 4. Throttle Plate with Screws. |           |

| Ref. Code | Product Details                                         |
|-----------|---------------------------------------------------------|
| BFT200F   | Butterfly valve, flanged end, 63 mm 2" size, BS Std     |
| BFT250F   | Butterfly valve, flanged end, 75 mm 2 1/2" size, BS Std |
| BFT300F   | Butterfly valve, flanged end, 90 mm 3" size, BS Std     |
| BFT400F   | Butterfly valve, flanged end, 110 mm 4" size, BS Std    |
| BFT600F   | Butterfly valve, flanged end, 160 mm 6" size, BS Std    |
| BFT800F   | Butterfly valve, flanged end, 200 mm 8" size, BS Std    |

## Dimensions (in mm)

| SIZE | 2"      | 2-1/2"  | 3"      | 4"      | 6"      | 8"      |
|------|---------|---------|---------|---------|---------|---------|
| D1   | 160     | 180     | 195     | 228     | 286     | 344     |
| D2   | 100-122 | 138-143 | 138-158 | 150-184 | 238-242 | 292-300 |
| D3   | 56      | 70      | 84      | 103     | 150     | 198     |
| D4   | 100     | 100     | 100     | 100     | 140     | 140     |
| L    | 190     | 190     | 240     | 240     | 310     | 310     |
| W1   | 44      | 49      | 52      | 55      | 75      | 93      |
| H1   | 224     | 247     | 284     | 320     | 400     | 475     |
| H2   | 100     | 115     | 135     | 157     | 190     | 230     |
| n-Øe | 4-20    | 4-20    | 8-20    | 8-20    | 8-24    | 8-24    |