



# SKIMMER

## Skimmer standard - concrete pools

Skimmer is ideally suited for pools where a full-size, residential performance, ABS Skimmer is desired. The corrosion proof series, Skimmer features a self-adjusting weir, large debris basket, flow control slide valve and auxiliary overflow port, multiple plumbing options allow for 50mm slip, 1-1/2" MTA and 2" FTA includes a vacuum plate for manual vacuuming of the pool with debris collected in the basket.

### Location of Skimmer

To obtain the most effective Skimming action over the entire surface, locate the Skimmer relative to the prevailing wind and drift, shape of pool and water circulation pattern with water level at mid-point of Skimmer opening.

### Adjustable Collar

1" Vertical adjustment to accommodate construction variances.

### Auxiliary Ports

To remove the auxiliary ports drill a small pilot hole in the center of the knock out. Then using a drill up to, but not exceeding, 3/4" remove the remaining material.


### Flow Control Slide Plate

For full flow adjustment move flow control slide plate to full open.  
To reduce flow, move slide plate across pump outlet as needed.



### Materials

1. Lid
2. Skimmer Collar
3. Vac Plate
4. Skimmer Body
5. Weir Assembly
6. Basket Assembly
7. Flow Control Slide Plate

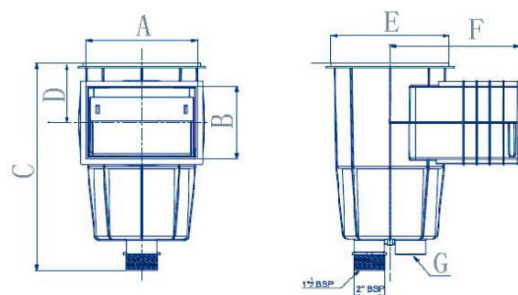

### Dimensions (in mm)

Ref. Code	A	B	C	D	E	F	G
ASSK15	201	140	416	111	230x230	243	50

NOTE : Wide mouth skimmer & mini skimmer available on request.