



FILTRATION SYSTEM

Valve Batteries - Manual

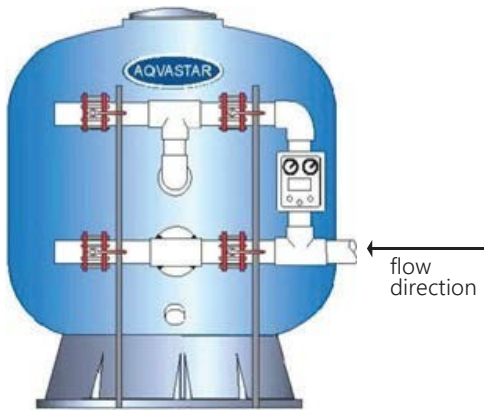

4 VALVE BATTERY

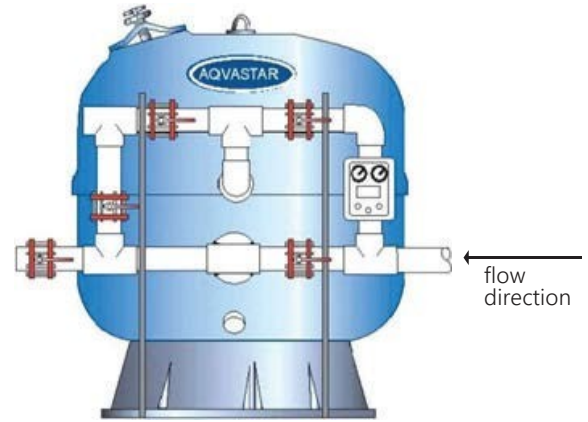

5 VALVE BATTERY

Valve batteries supplied loose for site assembly and include PVC-U fittings, pipes, butterfly valves and 2 x supports with 4 x pipe clips.

Note:

- Pressure gauge panel not included.
- Butterfly valves have EPDM seals and ratchet locking lever arms.
- Pipe and fittings are PN 10 rated.

TECHNICAL SPECIFICATION

Ref. Code	Conn In (mm)	Filtration Velocity		
		11 -30 m ³ /m ² /hr	30-40 m ³ /m ² /hr	40-50 m ³ /m ² /hr
ASVB 90-5	90	1400	1200	1050
ASVB 110-5	110	1600	1400	1400
ASVB 125-5	125	2000	1800	1600
ASVB 140-5	140	2350	2000	1800
ASVB 160-5	160	2500	2350	2000
ASVB 200-5	200	3000	2500	2350

SHELL THICKNESS

Model No	Thickness(mm)		
	Top Position	Middle Position	Bottom Position
AS1200C	≥12	≥7	≥14
AS1400C	≥12	≥7	≥14
AS1600C	≥13	≥8	≥15
AS1800C	≥14	≥8	≥15
AS2000C	≥15	≥10	≥17
AS2300C	≥15	≥11	≥17
AS2500C	≥16	≥12	≥18
AS3000C	≥16	≥12	≥20