

U-PVC VALVES

Butterfly valve


General characteristics

New Butterfly Valves extend COMER wide range of PVC, ABS, PE, PP, GFPP fittings, valves and technical tools. COMER Butterfly Valve represents the latest evolution within the market and fits for different applications, in particular: water treatment, irrigation, pools and industrial.

Main features are:

- Rubber gasket on the body with dual function of forming an hydraulic seal and isolating the body from any aggressive fluid circulating in the plant
- PP disc with reinforcement ribs allowing better chemical and mechanical resistance whilst ensuring low pressure drop in the full opening position
- Drilling pattern using oval slots allowing coupling of flanges according to: EN ISO 1452; EN ISO 15493; DIN 2501; ISO 7005-1; EN 1092-1: ASTM B16.5 Cl. 150
- Possible security block on the handle through the hole on the locking/unlocking device

U-PVC Butterfly valve – EPDM O-ring

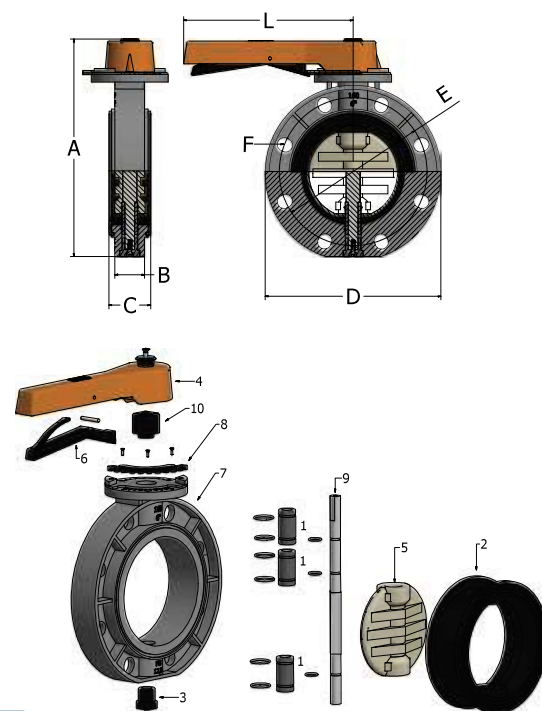

Aqvastar code	Factory Code	A	B	C	D	E	F	L	Gr.
BFTCOM250F	BUT10075	240	38	50	185	135	19.5 X 29.5	219	1,380
BFTCOM300F	BUT10090	250	40	54	191	152.5	19 X 26.5	239	1,555
BFTCOM400F	BUT10110	284	43	57.3	227	185	19 X 24.5	239	2,220
BFTCOM401F	BUT10125	325	48	67.3	255	210	21.9 X 27	274	3,400
BFTCOM500F	BUT10140	325	48	67.3	255	210	21.9 X 27	274	3,400
BFTCOM600F	BUT10160	349	48	67.5	284	239	22 X 25	274	3,870
BFTCOM800F	BUT10225	412	55	77	347	289	23 X 32	327	6,440

Pos.	Components	N°	Mat.
1	Bush	3	POM
2	Gasket	1	EPDM
3	Plug	1	POM
4	Handle	1	U-PVC
5	Disc	1	PP
6	Locking handle device	1	POM
7	Body	1	U-PVC
8	Graduated plate	1	POM
9	Stem	1	Steel HR
10	Insert	1	POM

BUT19 Flanged version available upon request

BUT30 version with Viton® gaskets available upon request