

Saltwater chlorinator for UV treatment




Model	Pool volume (m ³)	Flow (m ³ /h)	Reference
Minisalt UV 50	50	15	ELLY24NPSB-G0VX15
Minisalt UV 100	100	25	ELLY24NPSB-G0VX25
Minisalt UV 150	150	35	ELLY24NPSB-G0VX35

Technical specification

Display	LED display
Cell installation	in T
Cell orientation	horizontal or vertical
Cell length (mm)	291
Maximum pressure in the cell (bar)	2
Maximum flow in the cell (m ³)	22 or By-pass
Maximum water temperature (°C)	40
Control panel size (mm)	W 266 x H 360 x D 167

Installation Diagram

Only works with UV treatment already installed

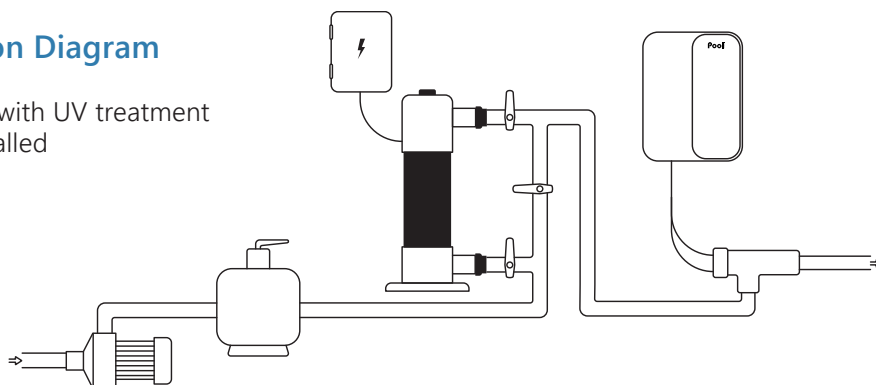

Benefits

- Saltwater chlorinator specially designed for UV system
- Only works with an installed UV treatment system
- Exemption from the use of persistent chemicals (hydrogen peroxide, etc.)
- Ensures the persistence of water disinfection
- Disinfected and disinfecting water without adding chemicals
- Compatible with our Mini UV sterilizer
- Soft and odorless bathing water
- Environmentally friendly disinfection solution
- 100% automatic and easy-to-use device
- Non-polluting waste water
- Highly reduced maintenance costs
- Easy installation and assembly

Features

- **Smart Power:** current monitoring ensuring stable production
- **Ultra Low Salt[®] technology:** operate at any salt level higher than 0,5 g/l
- **Self-cleaning cell with memory polarity inversion,** adjustable according to water hardness
- **Boost mode: 100% superchlorination for up to 24 hours** overcome an increased need of disinfectant
- **Low mode** to reduce chlorine production, when cover closed or bubbles cover installed
- **Safeties:** lack of water, low salt and cell fault

Warranties

2 years	Box
2 years	Cell

Pool TECHNOLOGIE

Made in FRANCE